

MODEL VGF-18

HEAVY DUTY GAS FRYER



SPECIFICATIONS:

42 - 48 lb. capacity heavy duty gas fryer, Vulcan-Hart Model No. VGF-18. Stainless steel front, front top ledge, stub back and 6" adjustable legs. Sides finished in black epoxy powder coat paint. 1 1/4" diameter front gas manifold. 16 gauge stainless steel fry tank with four heat exchanger tubes and a "V" shaped cold zone. 1" full port drain valve. Twin fry baskets with plastic coated handles. 120,000 BTU/hr. input. Standing pilot ignition system. Snap action thermostat adjusts from 200° to 400°F. Hi-limit gas shut-off.

Exterior dimensions: 18"w x 38"d x 36" working height on 6" adjustable legs.

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS AND FINISH WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

☐ **VGF-18** 42 - 48 lb. capacity

STANDARD FEATURES

- Stainless steel front, front top ledge, stub back and 6" adjustable legs.
- Sides finished in black epoxy powder coat paint.
- 1 1/4" diameter front gas manifold.
- Twin fry baskets with plastic coated handles.
- 16 gauge stainless steel fry tank, 42-48 lb. capacity.
- 1" full port ball type drain valve.
- 120,000 BTU/hr. input.
- Standing pilot ignition system.
- Four heat exchanger tubes positioned for easy cleaning.
- Snap action thermostat adjusts from 200° to 400°F.
- Hi-limit gas shut-off.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Filter ready for use with Vulcan MF50 filter.
- ☐ Stainless steel side(s). ☐ Left ☐ Right
- ☐ Stainless steel finishing back.
- ☐ Common stainless steel front top ledge up to 96" wide. (Drawing required showing the position of each piece of equipment.)
- ☐ Cap and cover manifold end(s). ☐ Left ☐ Right
- ☐ Leveling bolts in place of legs for curb mounting.
- ☐ Stainless steel dolly frame with casters, up to 72" wide.
- ☐ Rear gas connection. ☐ 3/4" (includes gas pressure regulator)


ACCESSORIES

- ☐ Set of four 5" diameter casters, two locking.
- ☐ Matching frymate drain cabinet.
- ☐ Apron style side drain board.
- ☐ Removable drain board basket.
- ☐ 26 1/2" or 37 3/4" high stainless steel back riser. (Common back risers available up to 72" wide.)
- ☐ Flexible gas hose with quick disconnect and restraining device. Consult price book for available sizes.



1. A properly sized gas pressure regulator suitable for battery or single unit application must be furnished and installed. Natural gas 5.0" W.C., propane gas 10.0" W.C.
2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
3. These units are manufactured for installation in accordance with ANSZ223.1a (latest edition), National Fuel Gas Code. Copies may be obtained from the American Gas Association, 1515 Wilson Blvd., Arlington, VA 22209.
4. Clearances:

	Combustible	Non-Combustible
Rear	2"	0"
Sides	20"	2"
5. For proper combustion, install equipment on adjustable legs or casters. On curb or platform, allow 3 1/2" front overhang. Leveling bolts are required for curb installation. Specify when ordering.
6. Cannot be batteried with GH series equipment.
7. This appliance is manufactured for commercial installation only and is not intended for home use.

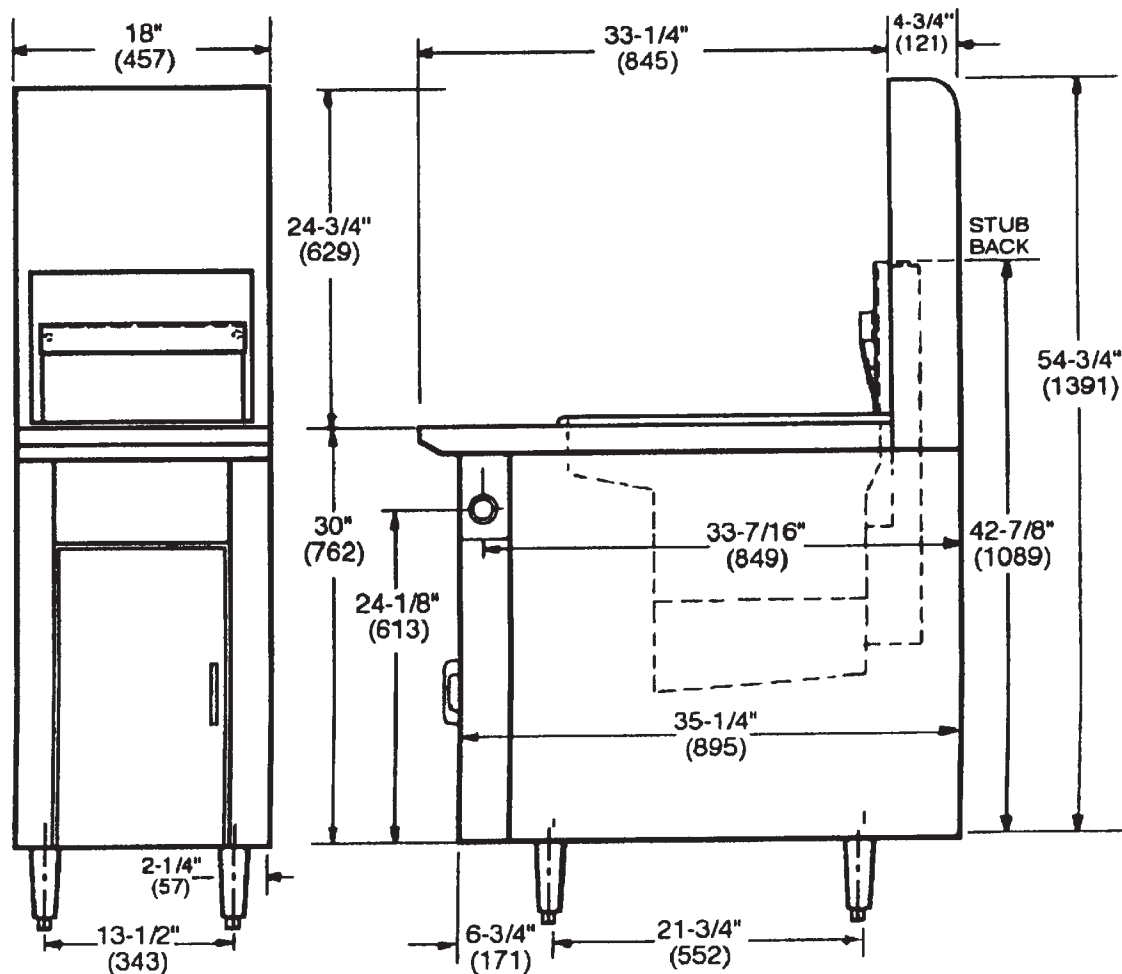

MODEL NO.	WIDTH	DEPTH	WORKING HEIGHT ON 6" LEGS	TANK SIZE	BTU/HR. INPUT	FRY COMP. CAPACITY	APPROX. SHP. WT. (lbs./kg)
VGF-18	18"	38"	36"	14" x 14"	120,000	42 - 48 lbs.	300/135

**VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028
502-778-2791 QUOTE & ORDER FAX: 1-800-444-0602**